





- > Test with NO mess
- > Holds Pressure for MONTHS
- > No theft issues
- > Safe - Easy removal
- > One Time use only
- > Low Cost - if lost or stolen
- > Holds High PSI
- > No more Tracking Blow-up-Balls
- > Saves Man hours - Reliable
- > No finger injury's
- > Test Large Jobs - all at once

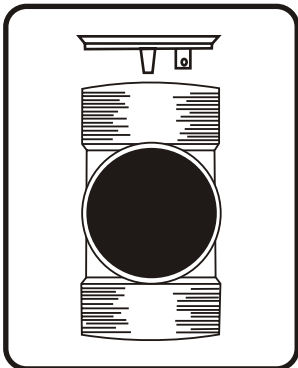

Make sure the fitting is clean without imperfections.


Apply SILICONE CAULK or BOWL WAX or PIPE DOPE, around bevel of fitting.

Slide Plug into fitting placing the TAB in the Center-Right Front

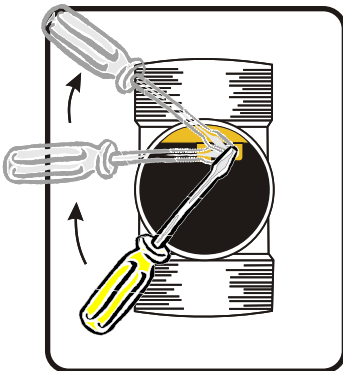

Cut PRONG to Release Water Pressure.

Pry Tab with long #3 Phillips Screwdriver in a continuous motion

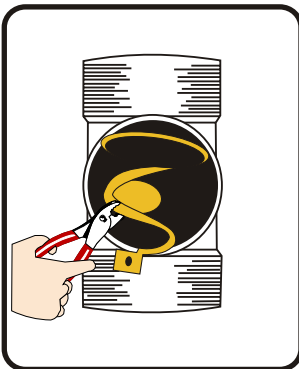

Grab the final piece with Pliers or Tin Snips